


## Durablanket S

### Thermal Conductivity vs Mean Temperature (per ASTM C-177)\*\*



\*\*All heat flow calculations are based on a surface emissivity factor of .90, an ambient temperature of 27 °C (80 °F), and zero wind velocity, unless otherwise stated. All thermal conductivity values for Fiberfrax materials have been measured in accordance with ASTM Test Procedure C-177. When comparing similar data, it is advisable to check the validity of all thermal conductivity values and ensure the resulting heat flow calculations are based on the same condition factors. Variations in any of these factors will result in significant differences in the calculated data.

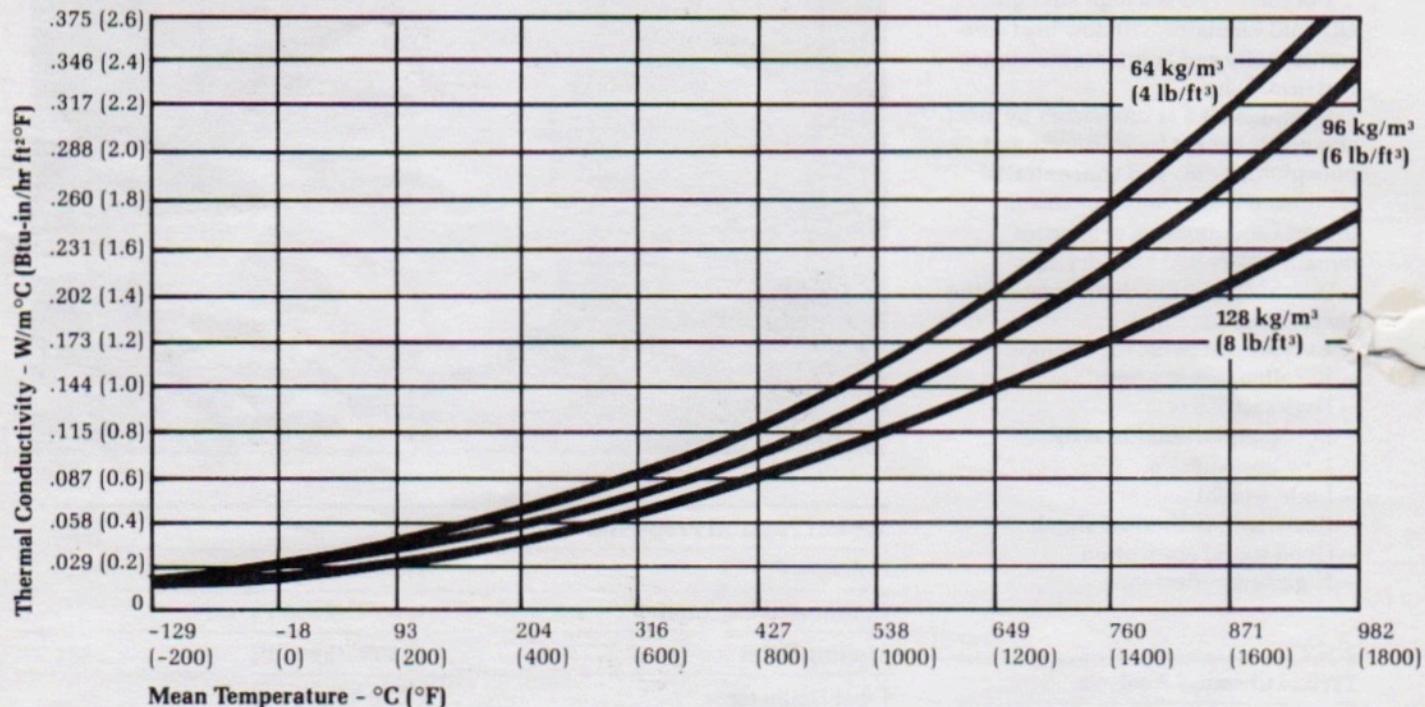

Thermal Products Company, Inc.  
4520 S. Berkeley Lake Rd.  
Berkeley Lake, GA 30071-1639  
770-662-0456  
770-242-6210 (Fax)  
[info@thermalproductsco.com](mailto:info@thermalproductsco.com)  
[www.thermalproductsco.com](http://www.thermalproductsco.com)

**Durablanket S 64 kg/m<sup>3</sup> (4 lb/ft<sup>3</sup>)\*\***

Hot Face °C (°F)	Insulation Thickness - mm (in)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	311 (591)	232 (449)	164 (328)	133 (271)	113 (236)	91 (196)	78 (173)
760 (1400)	367 (693)	277 (531)	199 (390)	161 (321)	138 (280)	110 (230)	94 (201)
871 (1600)	424 (795)	323 (614)	234 (454)	191 (375)	163 (326)	131 (268)	112 (233)
982 (1800)	480 (896)	369 (697)	271 (520)	222 (432)	191 (376)	153 (308)	131 (267)
1093 (2000)	536 (996)	416 (780)	308 (587)	254 (489)	219 (427)	177 (350)	151 (303)
1204 (2200)	590 (1094)	461 (862)	346 (655)	287 (548)	248 (479)	201 (394)	172 (342)
1260 (2300)	617 (1142)	484 (903)	364 (688)	303 (577)	263 (506)	214 (417)	183 (362)

**Durablanket S 96 kg/m<sup>3</sup> (6 lb/ft<sup>3</sup>)\*\***

Hot Face °C (°F)	Insulation Thickness - mm (in)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	287 (548)	210 (410)	147 (297)	118 (245)	102 (215)	82 (179)	71 (159)
760 (1400)	341 (646)	253 (488)	179 (355)	144 (292)	123 (254)	99 (210)	84 (184)
871 (1600)	397 (746)	298 (568)	213 (416)	173 (343)	147 (297)	118 (244)	101 (213)
982 (1800)	452 (845)	343 (649)	249 (480)	202 (396)	173 (344)	138 (281)	118 (244)
1093 (2000)	506 (943)	388 (731)	285 (545)	233 (451)	201 (393)	161 (321)	137 (278)
1204 (2200)	560 (1040)	433 (812)	322 (611)	264 (508)	228 (443)	184 (363)	157 (315)
1260 (2300)	587 (1088)	456 (852)	340 (644)	281 (537)	243 (469)	196 (385)	168 (334)

**Durablanket S 128 kg/m<sup>3</sup> (8 lb/ft<sup>3</sup>)\*\***

Hot Face °C (°F)	Insulation Thickness - mm (in)						
	6.4 (1/4)	13 (1/2)	25 (1)	38 (1 1/2)	51 (2)	76 (3)	102 (4)
649 (1200)	261 (501)	187 (369)	129 (265)	103 (218)	88 (191)	72 (161)	62 (144)
760 (1400)	311 (591)	226 (439)	158 (316)	126 (259)	107 (225)	86 (187)	74 (165)
871 (1600)	360 (680)	266 (510)	187 (369)	150 (302)	128 (262)	102 (216)	87 (189)
982 (1800)	408 (767)	305 (581)	217 (423)	175 (347)	149 (301)	119 (246)	101 (214)
1093 (2000)	456 (852)	344 (651)	248 (478)	201 (394)	172 (341)	137 (279)	117 (242)
1204 (2200)	502 (936)	382 (720)	279 (534)	227 (441)	195 (383)	156 (312)	132 (270)
1260 (2300)	525 (977)	401 (754)	294 (561)	240 (464)	207 (404)	166 (330)	141 (285)

\*\*All heat flow calculations are based on a surface emissivity factor of .90, an ambient temperature of 27°C (80°F), and zero wind velocity, unless otherwise stated. All thermal conductivity values for Fiberfrax materials have been measured in accordance with ASTM Test Procedure C-177. When comparing similar data, it is advisable to check the validity of all thermal conductivity values and ensure the resulting heat flow calculations are based on the same condition factors. Variations in any of these factors will result in significant differences in the calculated data.



**Thermal Products Company, Inc.**  
**4520 S. Berkeley Lake Rd.**  
**Berkeley Lake, GA 30071-1639**  
**770-662-0456**  
**770-242-6210 (Fax)**  
**info@thermalproductsco.com**  
**www.thermalproductsco.com**